

STEAMIST®

Steam Generator


Model: SM-46

Features

- 5-year parts warranty - 2-year labor warranty
- Generator typically can be installed up to 25 ft. from the bathing area
- Diagnostic LED Displays
- Stainless Steel Construction
- Solid-State Circuitry

Codes/Standards

- UL 499
- UL/CUL Listed
- City of LA - Approved
- City of New York - M.E.A. Approved
- State of Mass. Approved

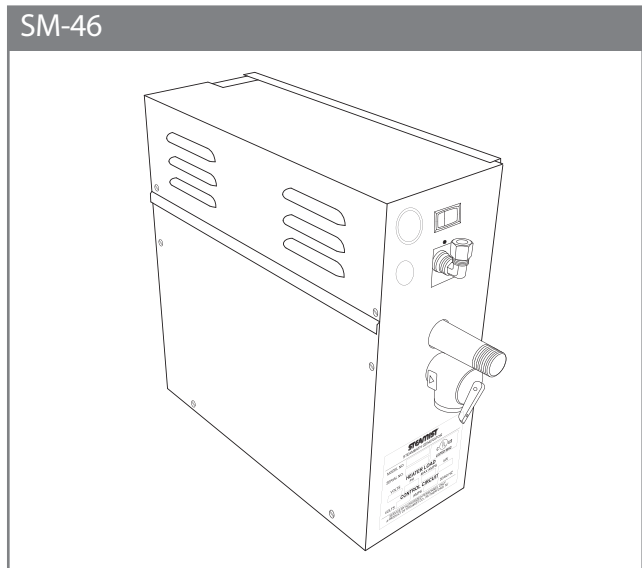

Steam Generator Specification Chart

| Model Number | Product Number | KW Rating | Max. Cu. Ft. Range * | Volts/Phase/ Max. Amps | Wire Size 90°C Copper AWG | Line Fuse | Dimensions L x W x H |
|--------------|----------------|-----------|----------------------|------------------------|---------------------------|-----------|----------------------|
| SM-46 | 4600 4601 | 4.5/6 | 60-130 | 240/1/25 208/1/29 | 8 8 | 35 40 | 15" x 6" x 15.5" |

*Refer to sizing guidelines to accurately determine the proper size generator for the installation.

Required Equipment

TC-110, TC-135, DSC-425, or DSP Controls

Required Electrical Service

Dedicated circuit required: See Specification Chart for proper electrical requirements

Product Information

Dedicated circuit required: See Specification Chart for proper electrical requirements

Water Supply - 3/8" Compression Fitting

Steam Line - 3/4" Brass BPT male thread

Pressure Relief Valve - 3/4" NPT female thread

Drain Line - None required

Auto Drain - Factory installed option

Generator

Weight - 34 lbs.

Installation Notes

Steam Generators can be typically mounted within 25 ft. of the bathing area.

Steam Generators should be accessible for service.

Do not install generators outside, in moist, humid area or in an area where parts may freeze or corrode.


Steamhead to be mounted 18" above floor or 6" above rim of tub and as far from the seating area as possible.

Rough-in Notes

Access: 21" W x 18" D x 22" H (28" W with Auto Drain)


Dimensional Drawing

Model: SM-46

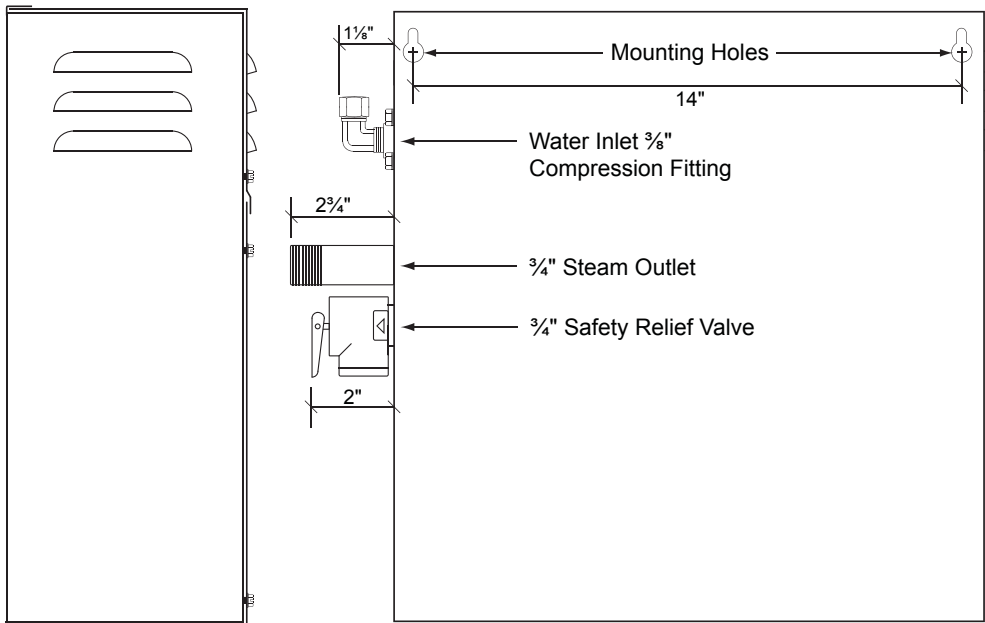


Rear Side View

Back View

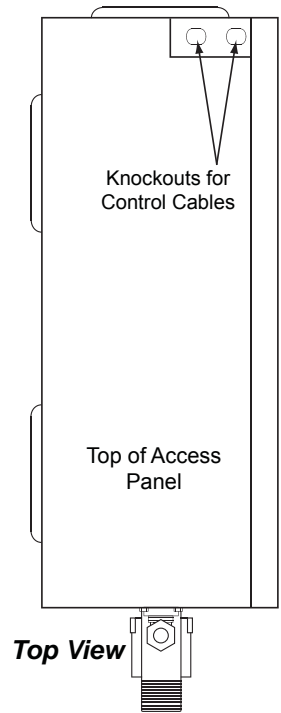


Top View

*Add 1/4" to the dimension for the louvers

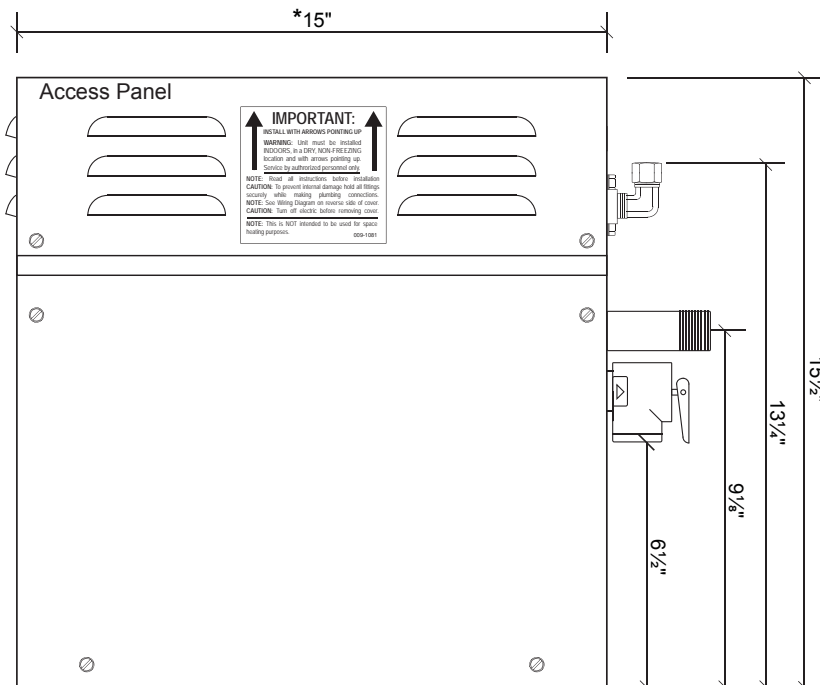

Front Access

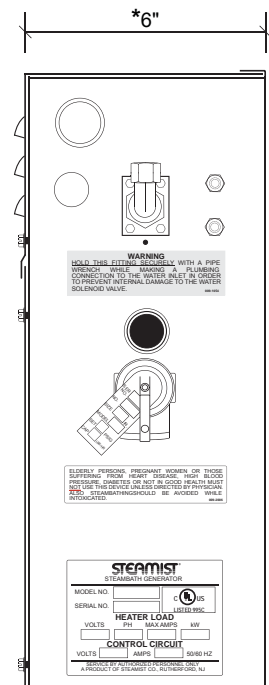

Front Side View