

STEAMIST®

Steam Generator


Model: SM-79

Features

- 5-year parts warranty - 2-year labor warranty
- Generator typically can be installed up to 25 ft. from the bathing area
- Diagnostic LED Displays
- Stainless Steel Construction
- Solid-State Circuitry

Codes/Standards

- UL 499
- UL/CUL Listed
- City of LA - Approved
- City of New York - M.E.A. Approved
- State of Mass. Approved

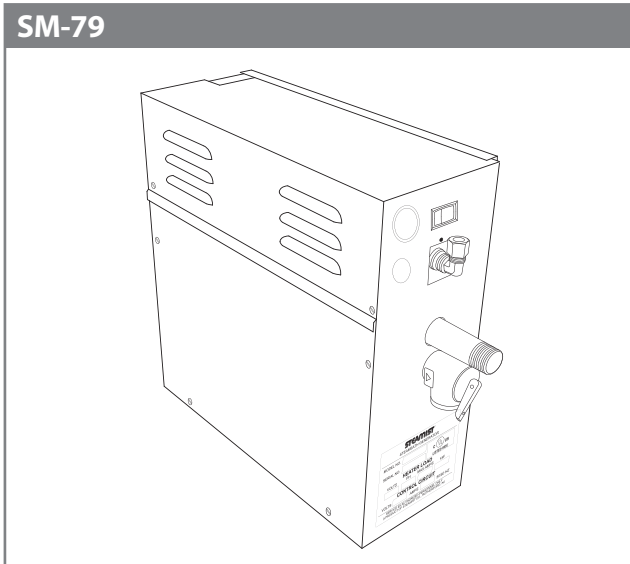

| Steam Generator Specification Chart | | | | | | | |
|-------------------------------------|----------------|-----------|---------------------|-----------------------|---------------------------|-----------|----------------------|
| Model Number | Product Number | KW Rating | Max. Cu. Ft. Range* | Volts/Phase/Max. Amps | Wire Size 90°C Copper AWG | Line Fuse | Dimensions L x W x H |
| SM-79 | 7900 7901 | 7.5/9 | 135-300 | 240/1/38 208/1/44 | 8 6 | 50 60 | 15" x 6" x 15.5" |

*Refer to sizing guidelines to accurately determine the proper size generator for the installation.

Required Equipment

TC-110, TC-135, DSC-425, or DSP Controls

Required Electrical Service

Dedicated circuit required: See Specification Chart for proper electrical requirements

Product Information

Dedicated circuit required: See Specification Chart for proper electrical requirements

- Water Supply - 3/8" Compression Fitting
- Steam Line - 3/4" Brass BPT male thread
- Pressure Relief Valve - 3/4" NPT female thread
- Drain Line - None required
(Auto Drain - special order from factory)

Generator

Weight - 34 lbs.

Installation Notes



- Steam Generators can be typically mounted within 25 ft. of the bathing area.
- Steam Generators should be accessible for service.
- Do not install generators outside, in moist, humid area or in an area where parts may freeze or corrode.
- Steamhead to be mounted 18" above floor or 6" above rim of tub and as far from the seating area as possible.

Rough-in Notes

Access: 21" W x 18" D x 22" H (28" W with Auto Drain)

Dimensional Drawing

Model: SM-79

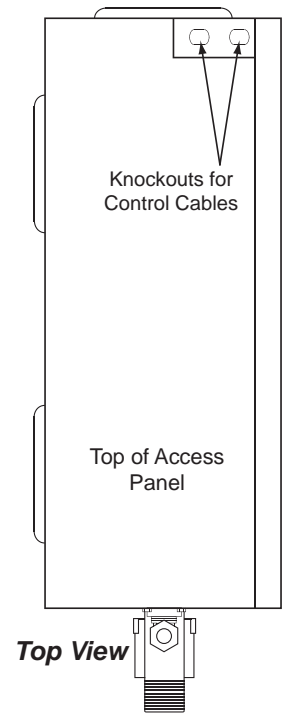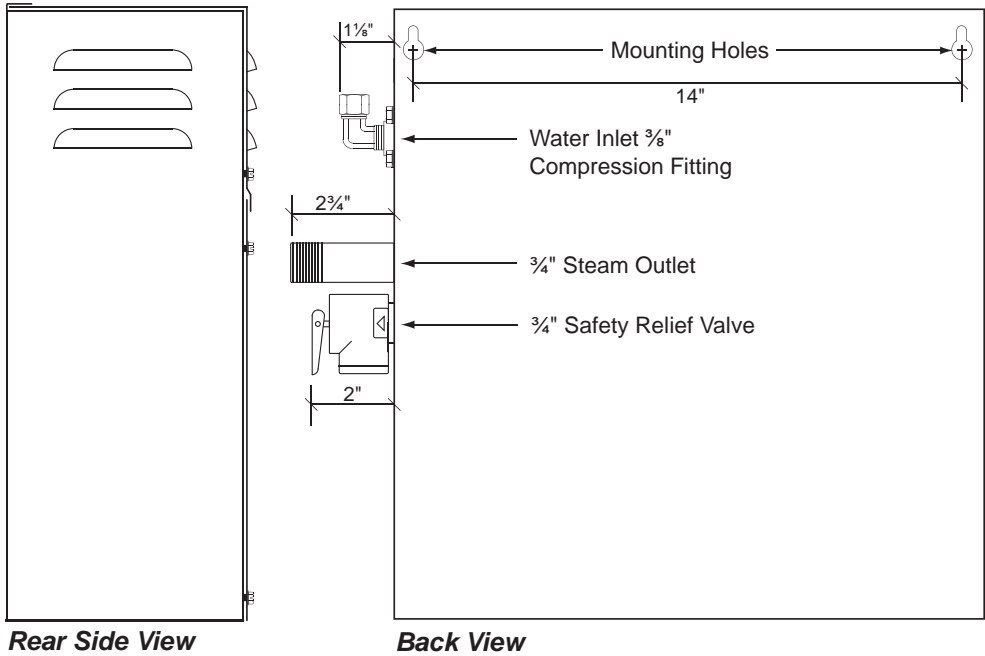

*Add 1/4" to the dimension for the louvers

